
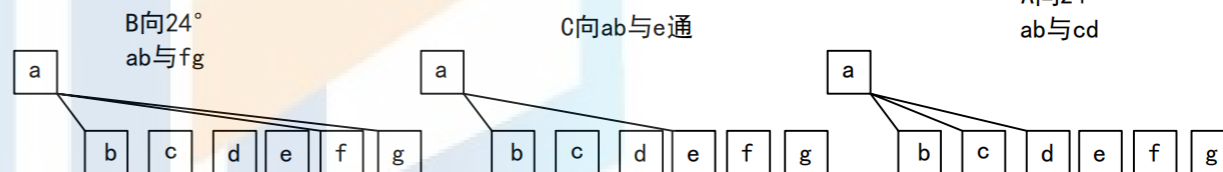
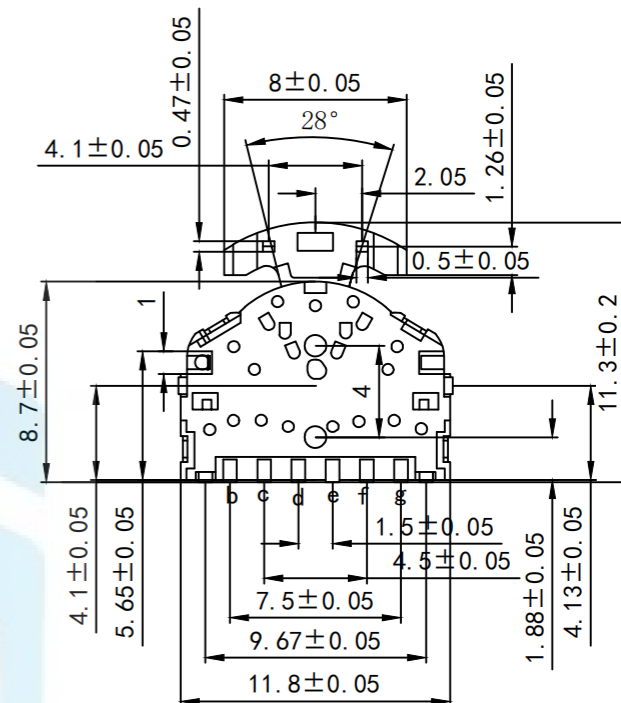
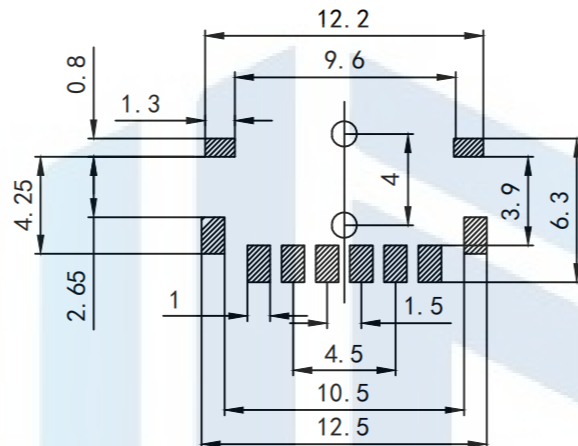
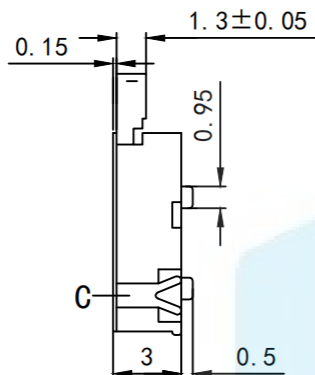


RoHS2.0
Compliant

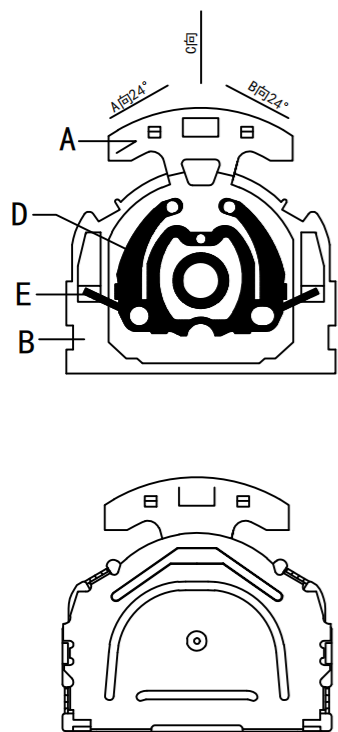


item

1. Rated current: 0.1A MAX
2. Rated voltage: DC 12V
3. Contact resistance: $\leq 100M\Omega$
4. Insulation resistance: $\geq 100M\Omega$
5. Compressive strength: AC110V 50Hz/1 min
6. Operation force: $2-100\pm 50gf$ $205\pm 50gf$
7. Mechanical life: 10000 cycles Min
8. Operating stroke: $0.85\pm 0.2mm$
9. Temperature range: $-30^{\circ}C \sim +85^{\circ}C$

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨轮开关

PART NO: 成品图

DRAWING NO: HQ-K2-01

DRAWN:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

18-10-08

18-10-08

18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4