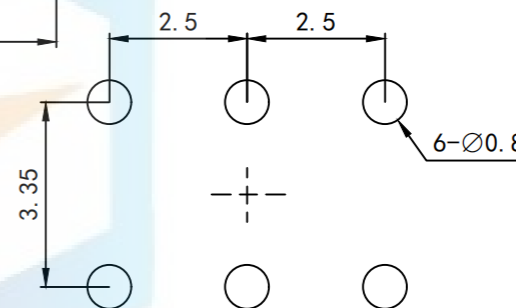
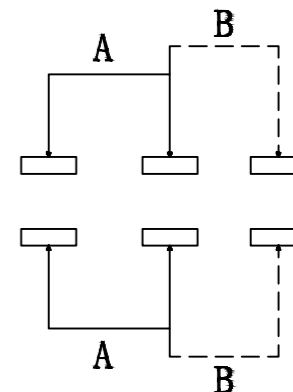
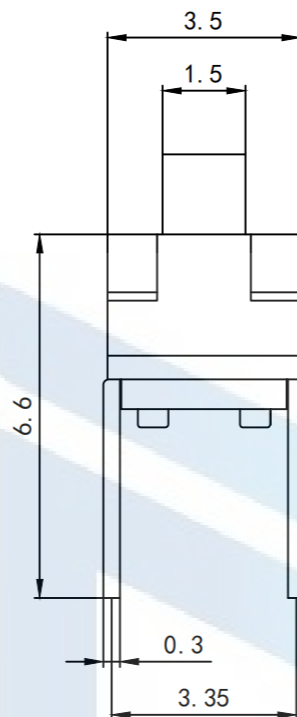
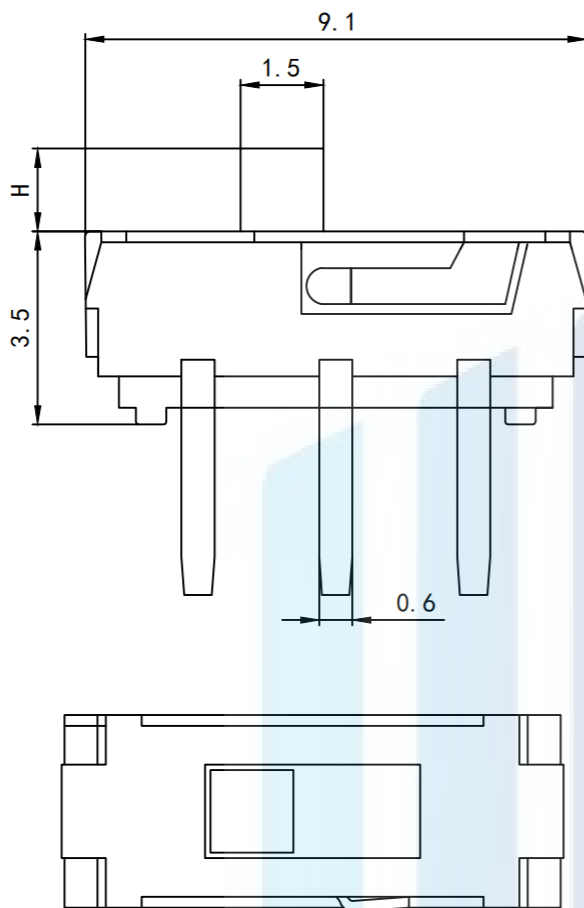




RoHS2.0
Compliant ✓



Technical requirements:
 Rated electrical load: DC12V 0.1A
 Insulation Resistance: $\geq 100M\Omega$
 Compressive Strength: AC250V (50Hz) 1min
 Ambient Temperature: $-25^{\circ}C \sim +70^{\circ}C$
 Relative humidity: ($40^{\circ}C$) $\leq 95\%$
 Contact Resistance: $\leq 50M\Omega$
 Actuation: $190gf \pm 30gf$
 Temperature Resistance: 250°
 Life span: 10000 times

| | | | | | |
|--|---|--|--|---|--|
| TOLERANCE X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^{\circ}$ |  | 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd | | | |
| | | https://www.hq-dz.com | | phone: 15812872448 | |
| PROTECTON  | | TITLE: 迷你拨动开关 | | PART NO: MSS-22D18立插 DRAWING NO: 9*3.5*3.5*H | |
| DRAWN: | | DATE: 18-10-08 | | UNIT: mm | |
| CHECKED: | | DATE: 18-10-08 | | SCALE: FULL | |
| APPROVED: | | DATE: 18-10-08 | | SIZE: A4 | |