



RoHS2.0  
Compliant

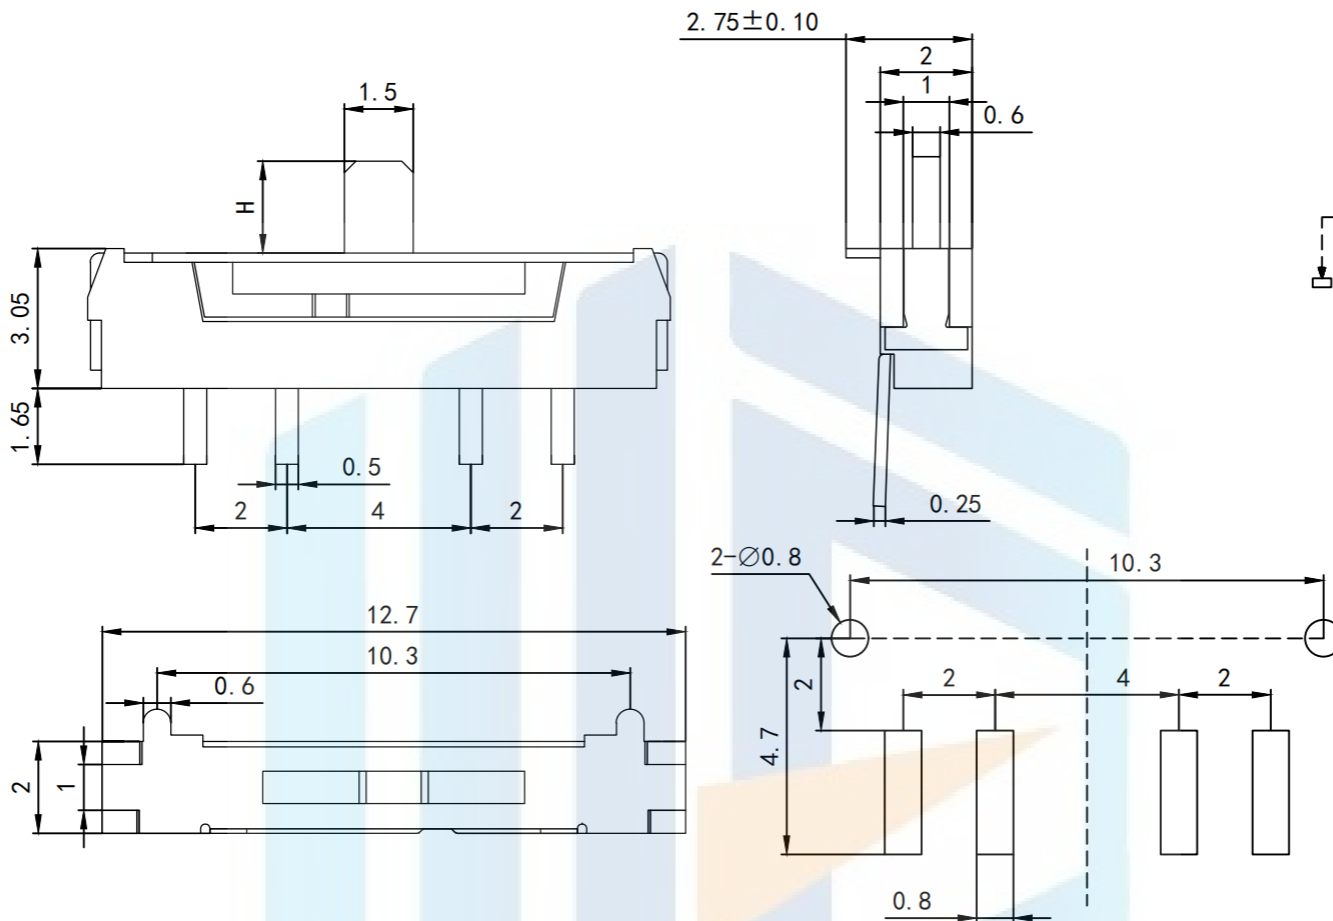

Technical requirements:

Rated electrical load: DC12V 0.1A

Insulation Resistance:  $\geq 100M\Omega$

Compressive Strength: AC250V (50Hz) 1min

Ambient Temperature:  $-25^{\circ}C \sim +70^{\circ}C$

Relative humidity: ( $40^{\circ}C$ )  $\leq 95\%$

Contact Resistance:  $\leq 50M\Omega$

Actuation:  $190 \pm 20gf$


tance:  $250^{\circ}$

Life span: 10000 times

TOLERANCE

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

迷你拨动开关

PART NO: MSKT-13D18

DRAWING NO: 12.7\*2.0\*3.0\*H

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4