
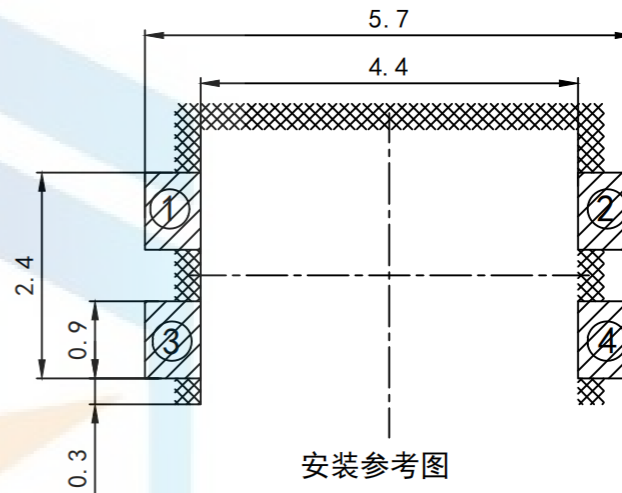
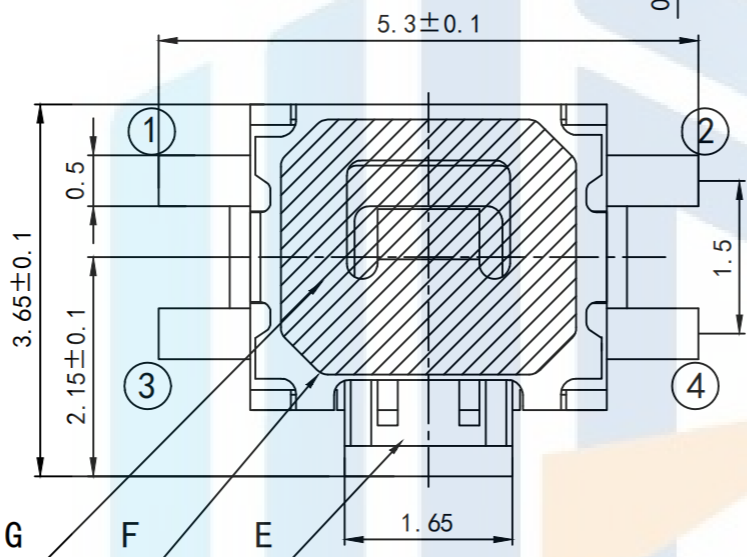

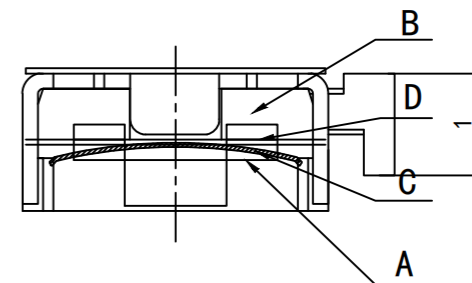


RoHS2.0
Compliant

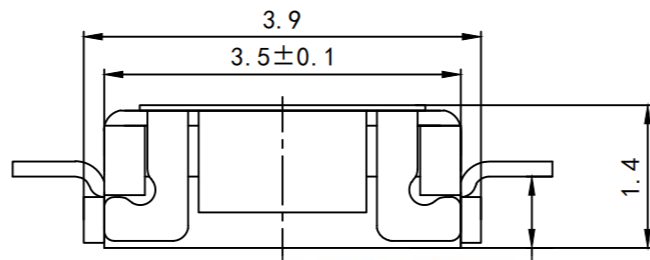

Technical Requirements:

1. The surface of the plastic parts is smooth and clean, without scratches, splashes, deformation, affecting the appearance and performance and other defects.
2. Rated current: 50mA. 12V DC, insulation resistance 100MΩmin, 100V DC, dielectric strength 250V AC for 1min, contact resistance 100mΩ max;
3. The switch feels obvious, the gear is clear and reliable, there is no stagnation, and it should be able to return quickly after eliminating external force.

| | | | | | |
|-----------|-------|-----------|---|----------------|--------------------------|
| TOLERANCE | | | 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd | | |
| X. XXX | ±0.05 | | https://www.hq-dz.com | | phone:15812872448 |
| X. XX | ±0.15 | | TITLE: | | PART NO:HQ-TS-A028 |
| X. X | ±0.20 | | 轻触开关 | | DRAWING NO:3*3.5*1.4小龟沉板 |
| X. | ±0.30 | | DRAWN: | | DATE: 18-10-08 |
| ANGLE | ±5.0° | CHECKED: | | DATE: 18-10-08 | |
| PROTECTON | | APPROVED: | | DATE: 18-10-08 | |
| | | | | UNIT: mm | |
| | | | | SCALE: FULL | |
| | | | | SIZE: A4 | |