



RoHS2.0
Compliant

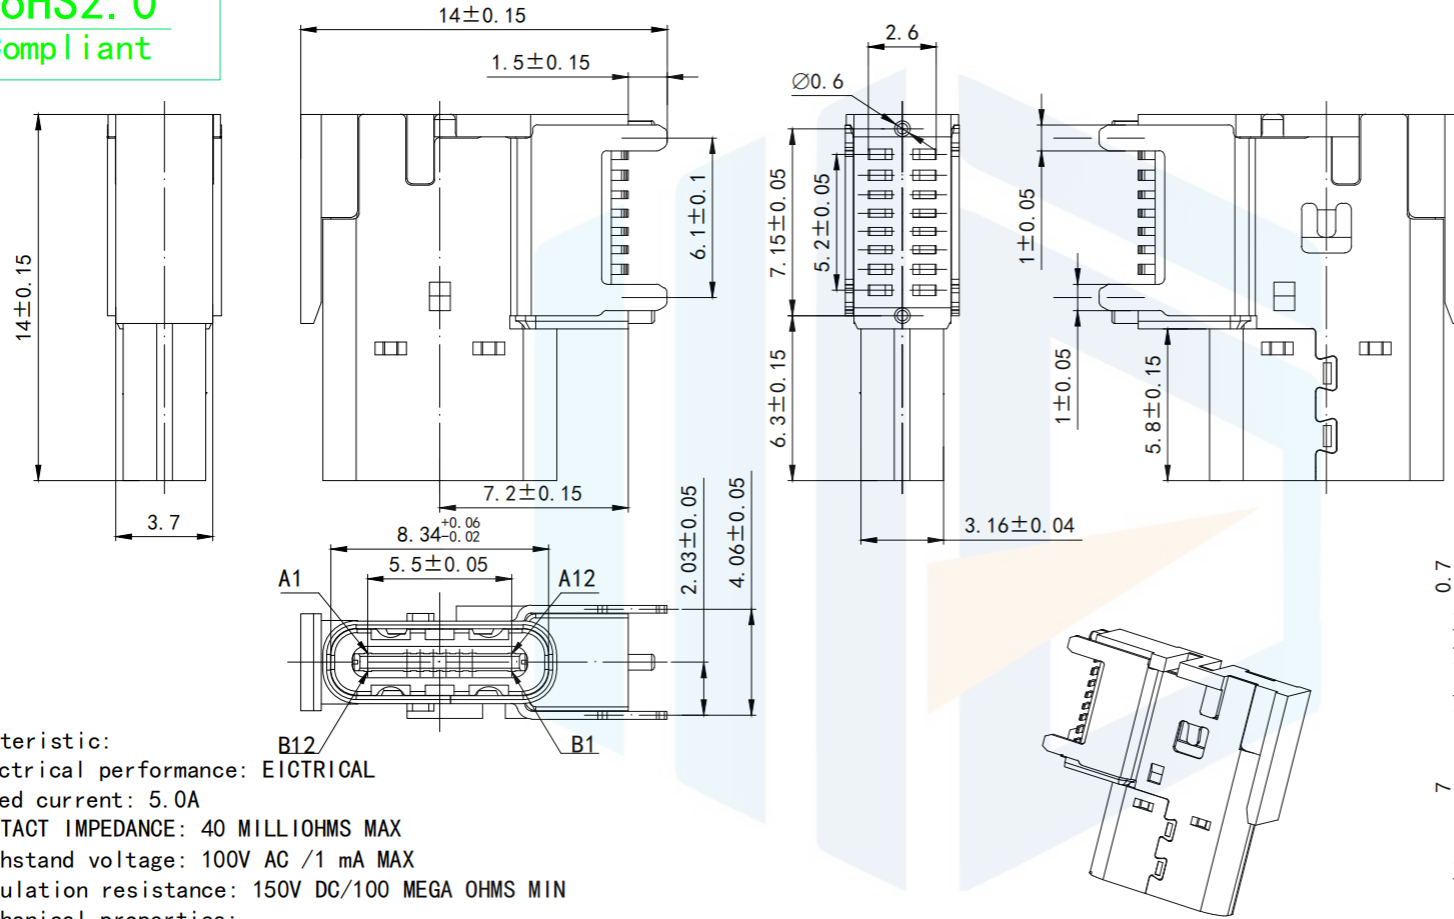

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

Characteristic:

- Electrical performance: ELECTRICAL
- Rated current: 5.0A
- CONTACT IMPEDANCE: 40 MILLIOHMS MAX
- Withstand voltage: 100V AC /1 mA MAX
- Insulation resistance: 150V DC/100 MEGA OHMS MIN
- Mechanical properties:
 - Insertion force: 5~20N; Dial-out force: 8~20N
 - Service life: 10000 times
 - Material: MATERIAL
 - Plating: FINISH
 - Terminal: Contact point gold plated 1u"MIN
The pin foot soldering area is gold-plated G/F
 - Shell: nickel plated 80u"MIN
- Electroplating products need to be tested for tin sticking: the tin area is more than 95%.
- SMT reflow soldering (peak 260° C±5° C) can not blister, melt, discoloration (deformation within the tolerance range)
- Working temperature: -55° C° C~+85° 0
- Salt spray test: no rust phenomenon through 48H salt spray test with a concentration of 5+1% salt water

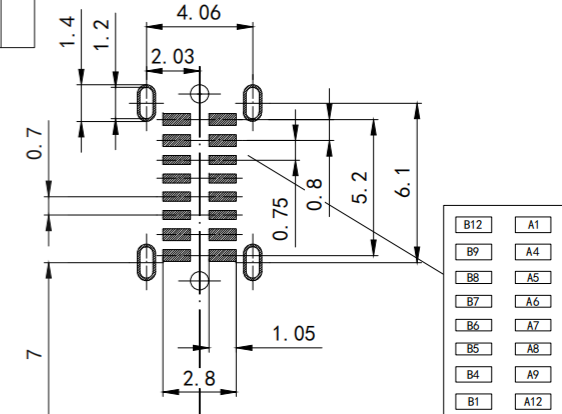

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
		https://www.hq-dz.com phone:15812872448		
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: TYPE C 16P侧贴基座垫高		
		PART NO: TYPE-C16P-CT014A		
		DRAWING NO: 14*14*3.16		
		DATE:	18-10-08	UNIT: mm
		DATE:	18-10-08	SCALE: FULL
		DATE:	18-10-08	SIZE: A4