

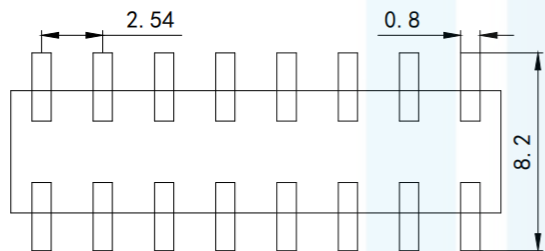
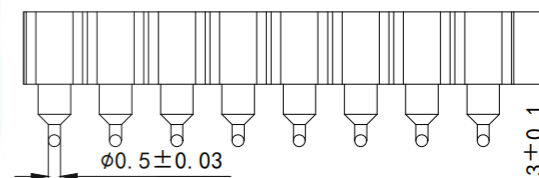


RoHS2.0  
Compliant

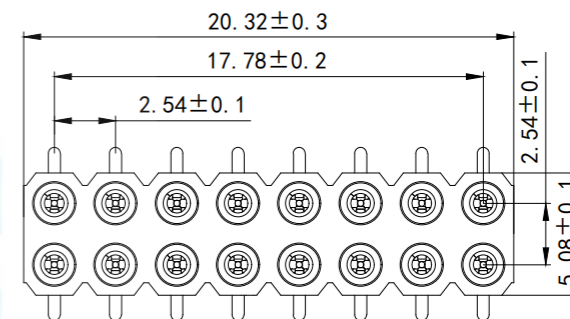

Recommended P.C.B  
Layout ( $\pm 0.05$ )



Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2  
 ClIp(Contact 4 Finger): Beryllium copper, heat teated

Insulator: PPS UL94V-0 colour: black

Current rating: 3Amps

Mating pin  $\phi$ : 0.38/0.56mm

Forces: (polished steel gauge  $\phi$ 0.43mm)

-Insertion: 2N typ

-Withdrawal: 1N typ

Mechanical life: min 500cycles

Contact resistance: max 10m

Dielectric strength: min 1000V RMS


Operaling temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Soldering temperature:  $+255^{\circ}\text{C}$

TOLERANCE

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

排母(圆针立贴)

PART NO: FH-2.54-S2XX

DRAWING NO: 8.2\*2.54\*针位

DRAWN:

CHECKED:

APPROVED:

DATE:

18-10-08

UNIT:  
mm

DATE:

18-10-08

SCALE:  
FULL

DATE:

18-10-08

SIZE:  
A4