



RoHS2.0  
Compliant

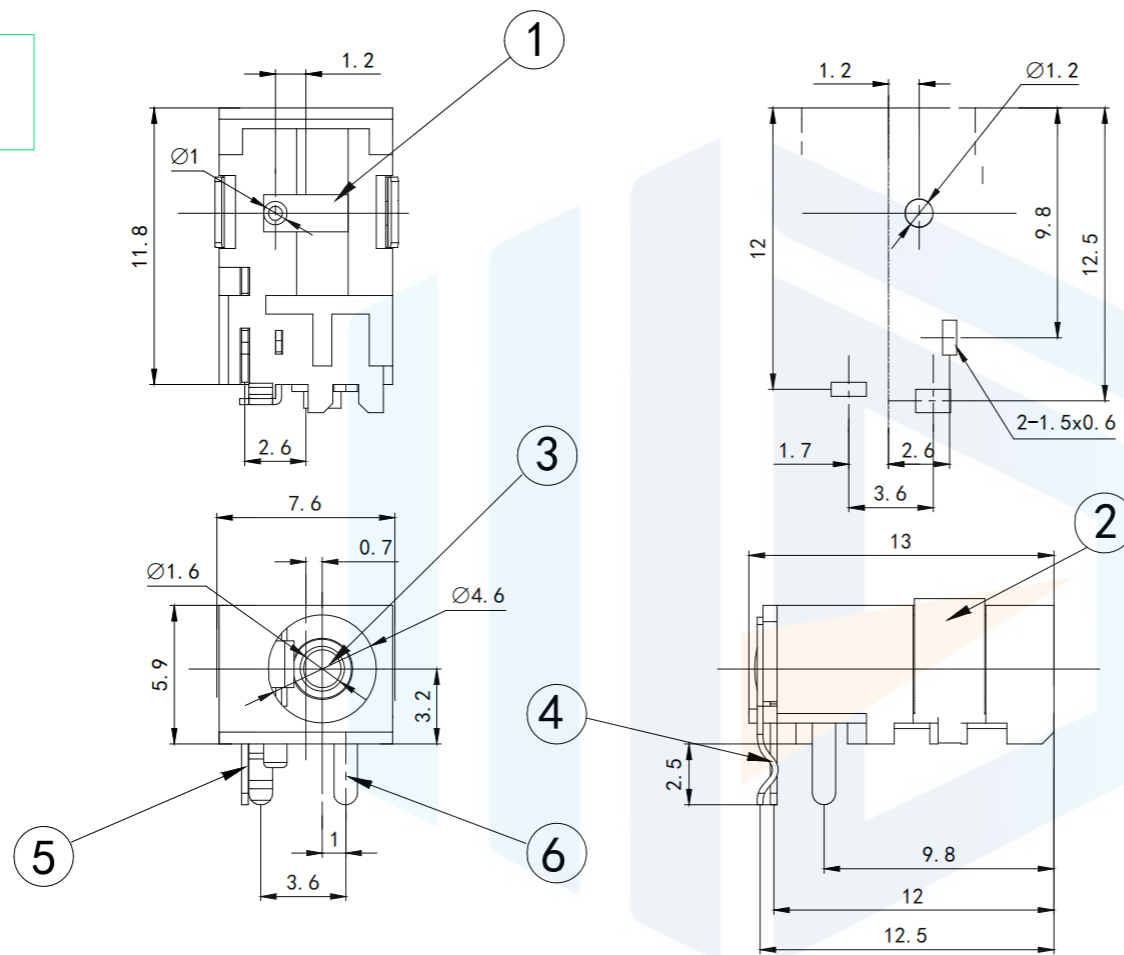

Technical requirements

1. Rated load: DC 30V 0.2A
2. Contact resistance:  $\leq 0.03 \Omega$
3. Insulation resistance:  $\geq 100 \Omega$  DC250V
4. Withstand voltage: AC 500V (50Hz)/min
5. Insertion force: 3~20N
6. Mechanical life: 5000 times

<b>TOLERANCE</b>			东莞市恒祺电子科技有限公司								
X. XXX	$\pm 0.05$		Dongguan Hengqi Electronic Technology Co., Ltd								
X. XX	$\pm 0.15$	https://www.hq-dz.com		phone:15812872448							
X. X	$\pm 0.20$	DC电源插座		PART NO:DC-030A							
X.	$\pm 0.30$			DRAWING NO:11.8*7.6*5.9							
ANGLE	$\pm 5.0^\circ$	<b>PROTECTON</b> 		DRAWN:		DATE:	18-10-08	UNIT:	mm		
				CHECKED:		DATE:	18-10-08	SCALE:	FULL		
				APPROVED:		DATE:	18-10-08	SIZE:	A4		