

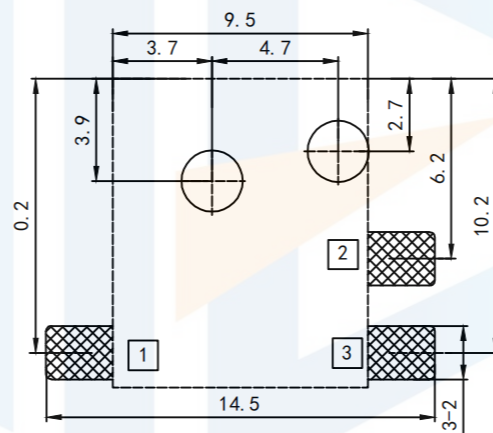
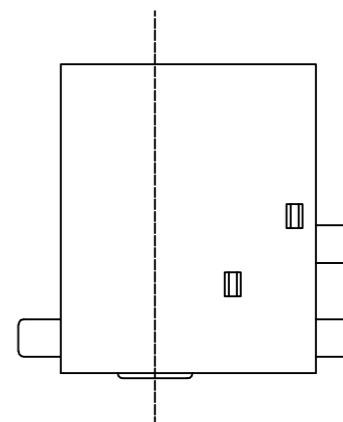
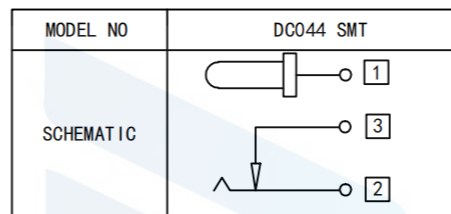
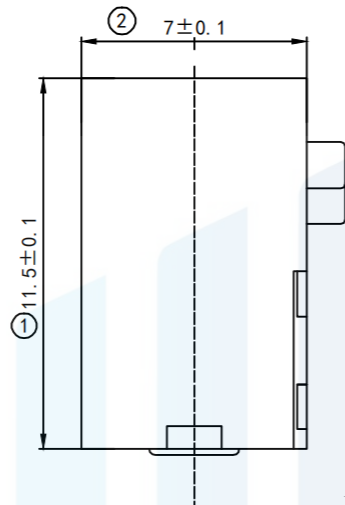


RoHS2.0
Compliant

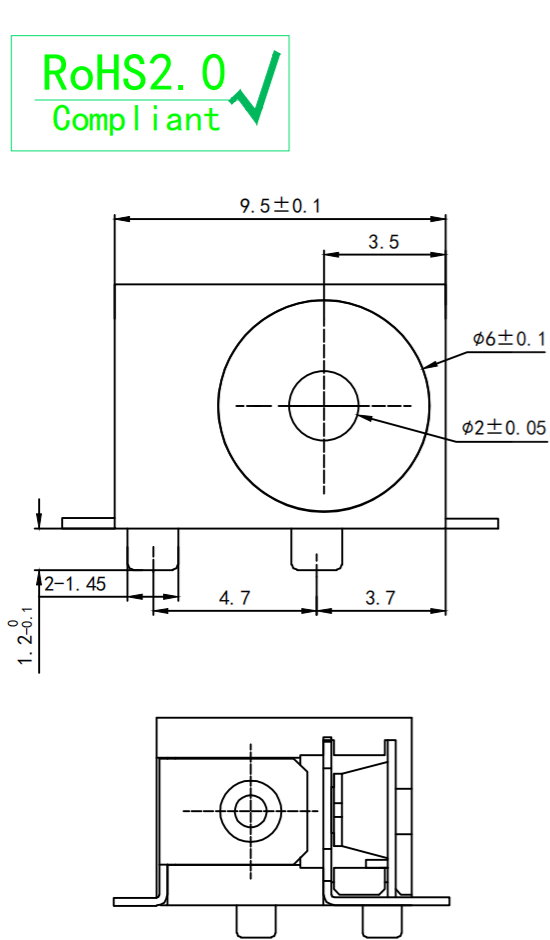

RECOMMENDED P. C. B LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(BOTTOM VIEW)

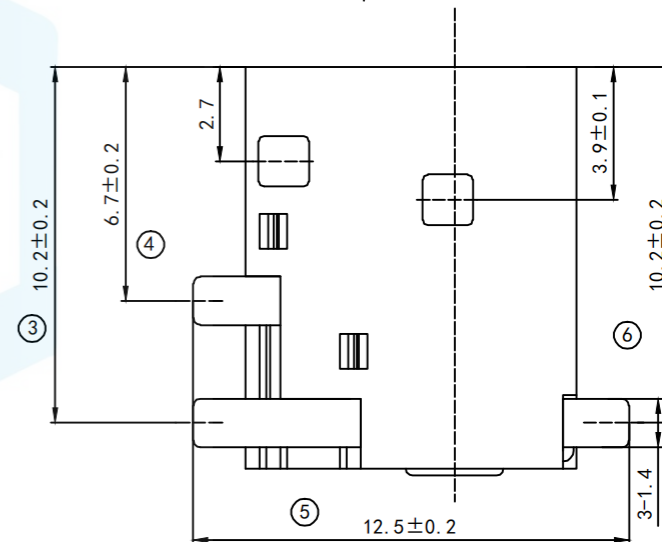

Specification:

- Rating : DC 25V 3A;
- Contact resistance; $< 30\text{m}\Omega$; After test: $< 50\text{m}\Omega$
- Insulation resistance: $> 100\text{M}\Omega$ (500VDC); After test: $\geq 50\text{M}\Omega$
- Withstanding voltage: 500VAC ;
- Insertion and extraction force: 3N~30N;
- life test: 5000cycles min;
- Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

DC电源插座

PART NO: DC-044E

DRAWING NO: 11.5*9.5*7

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4