
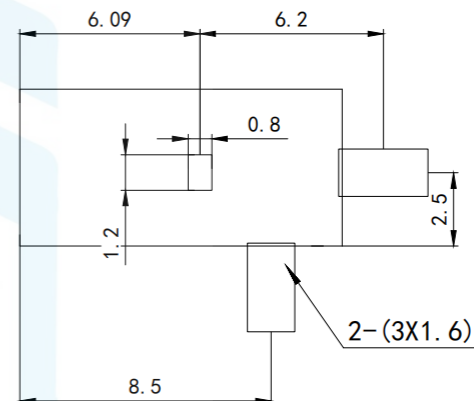
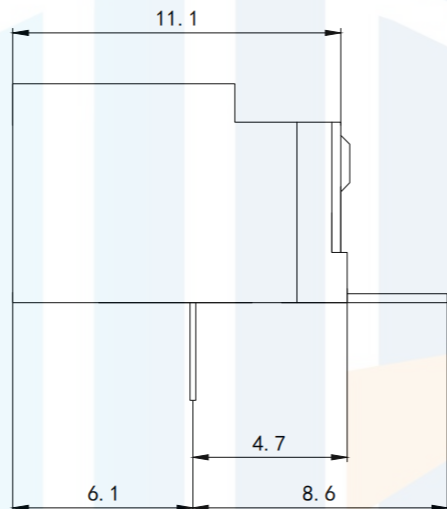


RoHS2.0
Compliant

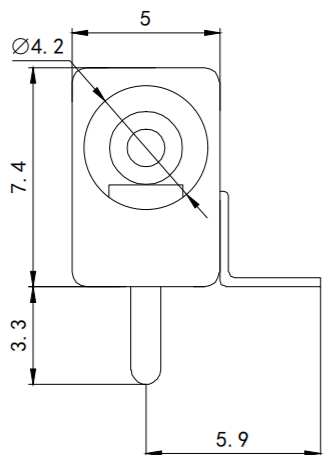

P. C. B LAYOUT TOP VIEW

TOLERANCE: UNLESS OTHERWISE SPECIFIED		
UNOER 1.5±0.05	1.5~10±0.1	OVER 10±0.2

PIN	∅1.0	∅1.1	∅1.3
APPD			

DC-002C	DC002C-1

Technical requirements

1. Rated load: DC 30V 0.2A
2. Contact resistance: $\leq 0.03 \Omega$
3. Insulation resistance: $\geq 100 \Omega$ DC250V
4. Withstand voltage: AC 500V (50Hz)/min
5. Insertion force: 3~20N
6. Mechanical life: 5000 times
7. Operation temperature range: $-40^{\circ}\text{C} \sim 55^{\circ}\text{C}$

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone: 15812872448	
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: DC电源插座	
		PART NO: DC-002C	
		DRAWING NO: 11.1*7.4*5	
		DATE:	18-10-08
		DATE:	18-10-08
		DATE:	18-10-08
		UNIT:	mm
		SCALE:	FULL
		SIZE:	A4